



















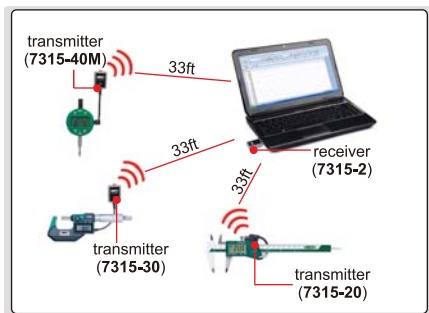


WIRELESS DATA TRANSFER SYSTEM

Part No.	Description	Plug to product	Remark
 receiver 7315-2	multichannel receiver		<ul style="list-style-type: none"> Connected with maximum 8 transmitters, each of which has a unique identification code. Text format virtual com port, converted to keyboard format with supplied software(data can be transmitted to EXCEL, WORD etc and any software that receives keyboard signal) Using EXCEL directional input software, the measurement data of different measuring tools can be transmitted to the specified area in the sheet.
 receiver 7315-3	single channel receiver		<ul style="list-style-type: none"> Connected with 1 transmitter only, transmitter can be changed as needed. No need to install drivers and softwares. Keyboard format(data can be transmitted to EXCEL, WORD etc. and any softwares which receives keyboard signal)
 receiver 7315-3	transmitter		for electronic calipers  for 1156 series electronic height gages  for electronic depth gages
 transmission button transmitter 7315-40M	transmitter		for electronic micrometers  for electronic three points internal micrometers 
 transmitter 7315-40M	transmitter		 for electronic indicators
	transmitter		 for electronic thickness gages  for electronic internal/external caliper gages
	transmitter		 for 2133 series, 2140-6 high precision digital indicators

- Transmission distance is 33ft
- Press the button to transmit data
- 7315-2 is supplied with EXCEL directional input software

7315-2 application (multichannel)



7315-3 application (single channel)

