


- Meet DIN863-3
- Micrometer head graduation: 0.01mm
- Adjust collars for different measuring ranges
- Anvil retracting range: 3mm
- Carbide measuring faces
- Optional accessory: dial indicators or digital indicators, setting standards (code **7386**)

Code	Range	Micrometer head range	Frame type	L	b
3633-100 *	0-100mm	25mm	steel plate	116mm	65mm
3633-200 *	100-200mm	25mm	steel plate	217mm	109mm
3633-300 *	200-300mm	25mm	steel plate	317mm	159mm
3633-400	300-400mm	25mm	steel plate	417mm	209mm
3633-500	400-500mm	25mm	steel tube	517mm	259mm
3633-600	500-600mm	25mm	steel tube	617mm	310mm
3633-700	600-700mm	25mm	steel tube	717mm	360mm
3633-800	700-800mm	25mm	steel tube	817mm	408mm
3633-900	800-900mm	25mm	steel tube	917mm	460mm
3633-1000	900-1000mm	25mm	steel tube	1017mm	512mm

* Supplied with manufacturer inspection certificate traceable to DKD Germany

MICROMETERS WITH DIAL INDICATOR

INSIZE PLUS
MADE IN GERMANY

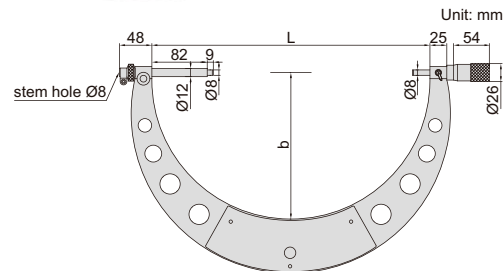

steel plate frame (0-400mm)