


CONCENTRICITY GAGE

to ensure the accuracy $3\mu\text{m}$,
the distance between measuring
point and roller should be $<50\text{mm}$




4786-1

- Accuracy: $3\mu\text{m}$
- $\text{Ø}50\text{mm}$ setting ring and $\text{Ø}55\text{mm}$ calibration cylinder are included
- Optional accessory: dial test indicator

Code	Applicable inside diameter	Applicable outside diameter
4786-1	$\text{Ø}24\text{-}64\text{mm}$	$\text{Ø}2\text{-}70\text{mm}$

Unit: mm

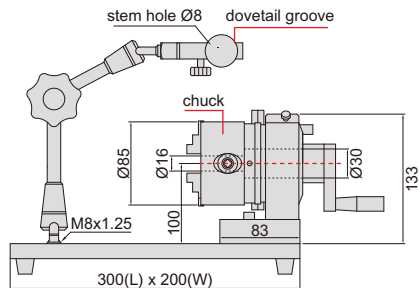

for cylinder



for tube

