

BS-128/101

Video Borescope



2.4" Color TFT LCD, supporting real-time live view.
Waterproof(IP67) flexible gooseneck retains configured shape.

Features

- Support real-time live view
- Highlighted with LED to support the operation in the dark
- 4 x AA battery
- Standby function to support the charge
- Support rotating the image 180° from top to bottom
- Flexible gooseneck imager head with waterproof
- 2.4" Color TFT LCD

Specifications


LCD screen type	2.4" TFT
LCD Pixels	480x234
The max number of frames(FPS)	30FPS/S
Gooseneck length	1m(39")
Camera diameter	17mm(0.66")
Viewing distance	5cm to 15cm
Viewing angle	68°
Working voltage	4 x AA

Size(HxWxD): 240mm x 160mm x 100mm

Weight: 584g

Accessories:

4 x AA battery, mirror, hook, magnet, gift box with carrying case.

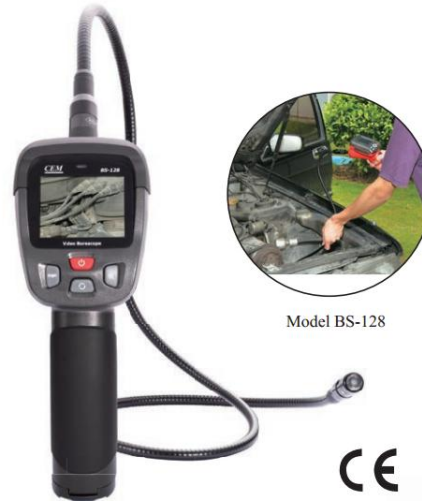

Model BS-128



EMC
EN: 61326

Features

- Support real-time live view
- TV peripherals to support operations in other devices
- Highlighted with LED to support the operation in the dark
- Built-in 1800mAh lithium battery, support USB charging
- Standby function to support the charge
- Support rotating the image 180° from top to bottom
- Flexible gooseneck imager head with waterproof
- 3.5" Color TFT LCD
- Camera and Video function

Specifications

LCD screen type	3.5" TFT
LCD Pixels	320x240
The max number of frames(FPS)	30FPS/S
Gooseneck length	1m(39")
Camera diameter	17mm(0.66")
Viewing distance	5cm to 15cm
Viewing angle	68°
Zoom	2.0X
Working voltage	Li Battery 3.7V/1800mA
TV-OUT	PAL/NTSC system



EMC
EN: 61326



Model BS-101

Size(HxWxD): 240mm x 160mm x 100mm

Weight: 584g

Accessories:

3.7V Li battery, power adaptor, mirror, hook, magnet, gift box with carrying case.

